

(12) UK Patent Application (19) GB (11) 2 334 859 (13) A

(43) Date of Printing by UK Office 01.09.1999

(21) Application No 9912720.1

(22) Date of Filing 01.12.1997

(30) Priority Data

(31) 08759997 (32) 05.12.1996 (33) US

(86) International Application Data
PCT/US97/21983 En 01.12.1997

(87) International Publication Data
WO98/25433 En 11.06.1998

(71) Applicant(s)

Ericsson Inc.
(Incorporated in USA - Delaware)
PO Box 13969, 7001 Development Drive,
Research Triangle Park, North Carolina 27709,
United States of America

(72) Inventor(s)

Eric L Valentine
Vladimir Alperovich

(51) INT CL⁶

H04Q 7/38 7/22

(52) UK CL (Edition Q)

H4L LECX L1H10 L1H8A

(56) Documents Cited by ISA

GB 2300787 A EP 0641137 A US 5442805 A
K Weiss et al., "Conventional local area radio coverage
system", 1991, Motorola Technical Developments, vol
13, pages 67-69

(58) Field of Search by ISA

INT CL⁶ H04Q


(74) Agent and/or Address for Service

Hasehtine Lake & Co
Imperial House, 15-19 Kingsway, LONDON,
WC2B 6UD, United Kingdom

(54) Abstract Title

Method and apparatus for restricting operation of cellular telephones to well delineated geographical areas

(57) The present invention provides a method and apparatus for restricting operation of a cellular telephone to well delineated geographical areas. The cellular telephone is equipped with a location device for ascertaining the current geographical location of the cellular telephone. The ascertained geographical location is compared with information pertaining to the allowability of operation of cellular telephones in various geographical locations. A determination is made as to whether the cellular telephone is allowed to operate in its current geographical location. The cellular telephone accordingly enables or disables transmitting by the transceiver of the cellular telephone.

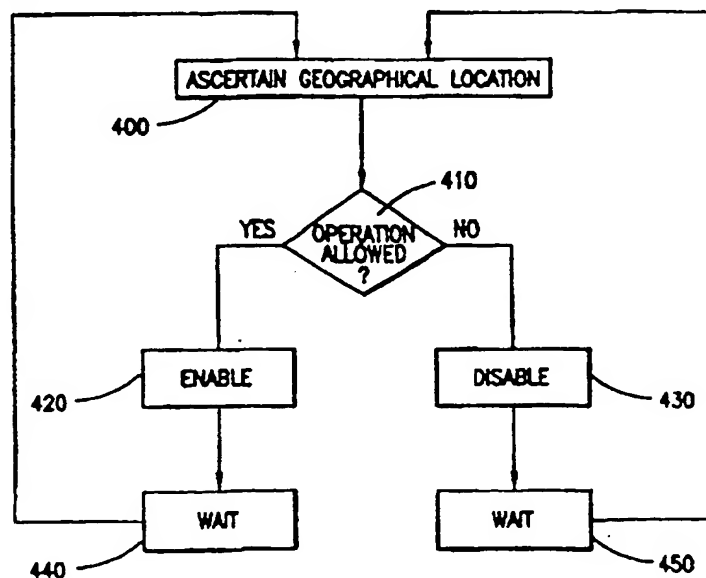

GB 2 334 859 A

THIS PAGE BLANK (USPTO)




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38, 7/22	A1	(11) International Publication Number: WO 98/25433 (43) International Publication Date: 11 June 1998 (11.06.98)
(21) International Application Number: PCT/US97/21983 (22) International Filing Date: 1 December 1997 (01.12.97) (30) Priority Data: 08/759,997 5 December 1996 (05.12.96) US (71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US). (72) Inventors: VALENTINE, Eric; 1600 Brazos Trail, Plano, TX 75075 (US). ALPEROVICH, Vladimir; 8419 Rain Dance Trail, Dallas, TX 75252 (US). (74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: METHOD AND APPARATUS FOR RESTRICTING OPERATION OF CELLULAR TELEPHONES TO WELL DELINEATED GEOGRAPHICAL AREAS

(57) Abstract

The present invention provides a method and apparatus for restricting operation of a cellular telephone to well delineated geographical areas. The cellular telephone is equipped with a location device for ascertaining the current geographical location of the cellular telephone. The ascertained geographical location is compared with information pertaining to the allowability of operation of cellular telephones in various geographical locations. A determination is made as to whether the cellular telephone is allowed to operate in its current geographical location. The cellular telephone accordingly enables or disables transmitting by the transceiver of the cellular telephone.

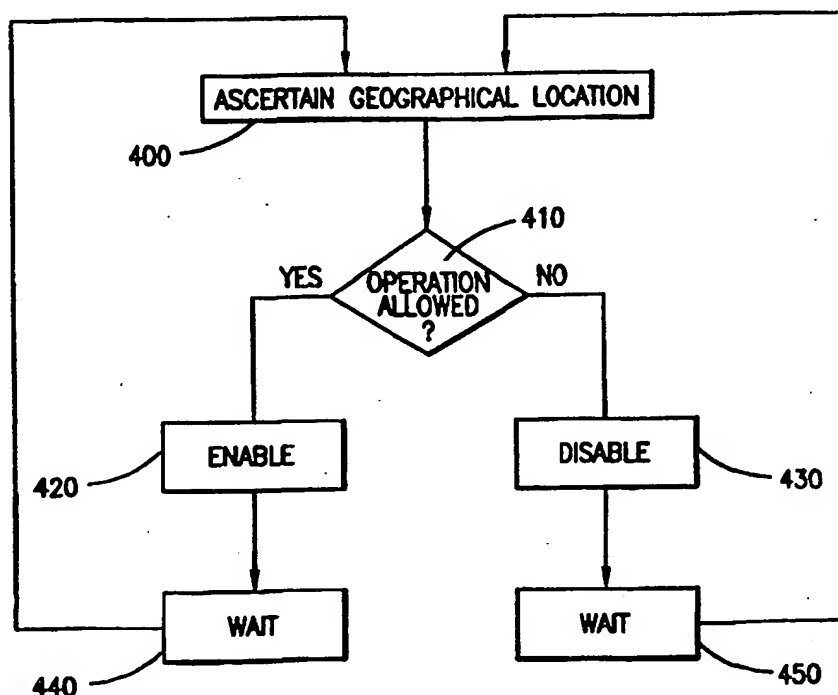

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

-1-

METHOD AND APPARATUS FOR RESTRICTING OPERATION OF
CELLULAR TELEPHONES TO WELL DELINEATED GEOGRAPHICAL AREAS

BACKGROUND OF THE INVENTION

5 Technical Field of the Invention

The present invention pertains in general to the planning and deployment of cells in a cellular telephone network, and more particularly, to restricting the operation of cellular telephones to well delineated geographical areas.

10 Description of Related Art

In the planning and deployment of a cellular telephone network, the geographical service area to be covered by the cellular telephone network is partitioned into a plurality of cells in order to facilitate frequency re-use. While in operation, a cellular telephone continually compares received signal strengths from base stations in cells adjacent to the cellular telephone. Typically, the cellular telephone establishes communication with the base station having the strongest signal. As the cellular telephone moves about the service area, signal strengths from the base stations vary and eventually the cellular telephone reselects a new base station or, if on call, is handed-off from the current base station servicing the cellular telephone to a base station now having a stronger signal. The exact geographical location where the reselection or hand-off occurs varies with the prevailing conditions in the physical environment with respect to the propagation of radio waves. This inexact demarcation between cells creates what may be called soft-edge cells. Furthermore, since the distance from which a cellular telephone can communicate with a base station varies, the service area of a cellular telephone network cannot have an exact geographical demarcation.

15
20
25
30
35

-2-

In certain locations it is desirable to prohibit the operation of cellular telephones. For example, the use of cellular telephones is currently prohibited in an airplane while the airplane is preparing for take-off since transmissions from the cellular telephone can interfere with the operation of the airplane. Although cellular telephone network providers can attempt to locate cell sites away from prohibited locations such as airport runways, it is unlikely that cellular telephone service can be excluded from the geographical location of the airport runway while at the same time providing service to geographical areas adjacent to the runway due the nature of soft-edge cells. It would be advantageous therefore, to develop a method and apparatus to create hard-edge cells where the ability to operate a cellular telephone is based on the geographical coordinates where the cellular telephone is located and not on the transmission distance of radio waves.

SUMMARY OF THE INVENTION

The present invention equips a cellular telephone with a locating device for ascertaining the geographical location of the cellular telephone. In one embodiment of the present invention, the cellular telephone is further equipped with a memory containing information regarding the allowability of operation in various geographical locations. In this embodiment, the cellular telephone compares the ascertained geographical location with restricted location information contained in the memory to determine whether operation is allowed in the ascertained geographical location. Based on this determination, the cellular telephone either enables or disables operation of the cellular telephone or of a requested service or capability of the cellular telephone.

In a second embodiment of the present invention, the cellular telephone transmits its ascertained geographical location to the supporting cellular telephone network.

-3-

The network accesses a database containing information regarding the allowability of operating the cellular telephone in various geographical locations and compares the transmitted ascertained geographical location with information contained in the database to determine whether the requested operation, service, or capability of the cellular telephone is authorized or prohibited in the cellular telephone's current location. The network then transmits a signal authorizing or denying cellular telephone operation based on the determination. Based on this signal, the cellular telephone either enables or disables operation.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, reference is made to the following Detailed Description taken in conjunction with the accompanying Drawings wherein:

FIGURE 1 is a block diagram illustrating a cellular telephone and cellular network;

FIGURE 2 depicts the geographical service area of two cellular telephone networks divided into multiple cell sites; and

FIGURE 3 is a flow diagram of a method for implementing the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to FIGURE 1, there is illustrated a cellular telephone 100 including a transceiver 110, a controller 120, and a locating device 130. The locating device 130 allows the cellular telephone 100 to determine its geographical location. The geographical location can be expressed in geographical coordinates such as longitude and latitude or alternatively, the geographical location can be expressed as a distance from a fixed geographical point. An example of a locating device 130 is a Global Positioning System (GPS) which receives transmissions from

-4-

satellites 140 to determine longitude and latitude coordinates. The locating device 130 communicates the ascertained geographical location to the controller 120 and transceiver 110.

5 In a first embodiment of the present invention, the cellular telephone 100 is equipped with a memory 150. The memory 150 can be independent or can be part of a Subscriber Identity Module (SIM) card 160 which is used
10 in cellular telephones which conform to the Global System for Mobile Communication (GSM) standard. The memory 150, whether it is independent or part of the Subscriber Identity Module card 160, contains information regarding the allowability of operation in various geographical
15 locations. The controller 120 compares the ascertained geographical location calculated by the locating device 130 with information contained in the memory 150 to determine whether the cellular telephone is authorized to operate in its present geographical location. If the cellular telephone is authorized to operate in its present
20 geographical location, the controller authorizes the transceiver to transmit. Otherwise, if the controller 120 determines that the cellular telephone 100 is prohibited from operating in its present geographical location, it disables the transceiver 110 from transmitting. The
25 information contained in the memory 150 can either be preprogrammed or it can be downloaded from a cellular telephone network 170 via a base station 180 currently servicing the cellular telephone 100. In the latter approach, the cellular telephone network 170 can
30 periodically update the information contained in the memory 150 of cellular telephone 100 through periodic broadcasts on the broadcast channel.

 In a second embodiment of the present invention, the
35 locating device 130 determines the location of cellular telephone 100 and communicates the location to transceiver 110. The transceiver 110 transmits the ascertained geographical location of cellular telephone

-5-

100 to base station 180 in communication with the cellular telephone 100. The cellular telephone network 170 accesses a database 190 which contains information regarding the allowability of operation of cellular
5 telephones in various geographical locations. The ascertained geographical location transmitted by cellular telephone 100 is then compared with information contained in the database 190 to determine whether the cellular telephone 100 is allowed to operate in its current
10 geographical location. Based on this determination, the base station 180 transmits either an authorization signal allowing operation of the cellular telephone 100 or a signal denying operation of cellular telephone 100 in its current geographical location.

15 In addition to sending a signal denying operation of cellular telephone 100, the base station 180 must also transmit a retransmission parameter indicating when the cellular telephone 100 is allowed to transmit a new geographical location in order to receive authorization
20 to operate in the future. The retransmission parameter can take several forms including, a period of time which must elapse before the cellular telephone can retransmit its ascertained geographical coordinates, a distance the cellular telephone must travel from its current
25 geographical location before retransmitting a new ascertained geographical location, or a set of geographical coordinates beyond which the cellular telephone 100 must travel before retransmitting. Upon receiving the authorization or denial signal from base
30 station 180, the controller 120 of cellular telephone 100 either enables operation of cellular telephone 100 or disables the transceiver 110 from transmitting until the retransmission parameter allowing transmitting by transceiver 110 has been met. The base station 180 may
35 also retain the most current geographical location of cellular telephone 100 for use by the cellular telephone network 170 in providing cellular telephone service.

-6-

In either of the two embodiments described above, the base station 180 also instructs the cellular telephone 100 as to when and how often location updating is to occur. In a first approach, the base station 180 instructs the cellular telephone 100 to perform periodic location updating with the period set by the base station 180. In a second approach, the base station 180 instructs the cellular telephone 100 to perform location updating only when the cellular telephone location has changed by a distance set by the base station 180. In a third approach, the cellular telephone 100 performs location updating only at the request of the base station 180. In a fourth approach, the cellular telephone 100 performs location updating as described in the first and second approach but increases the frequency as the cellular telephone 100 approaches a restricted area.

Referring additionally now to FIGURE 2, there is illustrated a first geographical service area 200 of a first cellular telephone network and a second geographical service area 210 of a second cellular telephone network. The first geographical service area 200 includes a plurality of cells 220 serviced by a plurality of base stations 230. Likewise, the second geographical service area 210 includes a plurality of cells 240 serviced by a plurality of base stations 250. The first and second cellular telephone networks share a plurality of base stations 260 along the border 270 between the first geographical service area 200 and the second geographical service area 210. The shared base stations 260 provide cellular telephone service for the first cellular telephone network in portions of cells 280 located in the geographical service area 200 and provide cellular telephone service for the second cellular telephone network in those portions 290 of cells which lie in the geographical service area 210. Also included in FIGURE 2 is a restricted geographical area 300 (e.g., airport

-7-

runways) where transmissions by cellular telephones are prohibited.

As a cellular telephone 310 moves about the first geographical service area 200, the cellular telephone 310 monitors its geographical location and verifies whether operation is allowed at its ascertained geographical location using either of the two embodiments previously described. Likewise, as the cellular telephone 310 moves about the geographical service area 210, the cellular telephone 310 monitors its geographical location and verifies whether operation is allowed at its ascertained geographical location. As the cellular telephone 310 embodying the present invention approaches the border 270 between the first cellular telephone service area 200 and the second cellular telephone service area 210, the cellular telephone 310 is capable of knowing when it crosses the border 270. If the cellular telephone has subscribed to cellular telephone service from the cellular telephone service providers of both geographical service areas 200 and 210, then the cellular telephone continues to receive cellular telephone service in both geographical service areas 200 and 210. Furthermore, the subscriber is billed for cellular telephone service in each of the two geographical service areas 200 and 210, according to the actual service which was provided by each of the two cellular telephone service providers. On the other hand, if the cellular telephone 310 has subscribed to service from only one of the cellular telephone networks, then the cellular telephone 310 is prohibited from operating in that geographical service area to which the cellular telephone 310 has not subscribed. Thus, even though the cellular telephone 310 may be communicating with a base station 260 servicing both cellular telephone networks, the mobile station 310 loses cellular telephone service as it crosses the border 270 from a geographical service area to which the cellular telephone is a subscriber into a geographical service area to which the cellular

-8-

telephone 310 is not a subscriber. In a similar fashion, cellular telephone 310 disables its transceiver from transmitting when entering the prohibited geographical area 300, even though cellular telephone service extends into the prohibited region 300.

Referring additionally now to FIGURE 3, there is illustrated a flow diagram for implementing the present invention. During operation of cellular telephone 100, the cellular telephone periodically ascertains its current geographical location (step 400). A determination as to whether the cellular telephone 100 is allowed to operate in its current geographical location is made (step 410). In one embodiment of the present invention, this determination is made within the cellular telephone 100. In a second embodiment of the present invention, this determination is made by the cellular telephone network and, in particular, a base station 180. Once the determination has been made, following a manner consistent with either of the embodiments of the present invention, the controller 120 of cellular telephone 100 accordingly enables (step 420) or disables (step 430) transmitting by transceiver 110. If operation has been allowed, the cellular telephone 100 waits until it is time to update the geographical location (step 440) as described in the embodiments above and then returns to (step 400). If transmitting by the transceiver 110 has been disabled (step 430) the cellular telephone waits for the retransmission parameter to be met (step 450) as described in the previous embodiments and then progresses to (step 400) to ascertain its new geographical location.

Although preferred embodiments of the method and apparatus of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it is understood that the invention is not limited to the embodiments disclosed, but is capable of numerous rearrangements, modifications, and substitutions without departing from the spirit of the

-9-

invention as set forth and defined by the following claims.

-10-

WHAT IS CLAIMED IS:

1. An apparatus for restricting operation of a cellular telephone based on the geographical location of the cellular telephone comprising:

5 a locating device within the cellular telephone for ascertaining the geographical location of the cellular telephone;

means for determining whether the cellular telephone is allowed to operate in the ascertained geographical location; and

10 means for disabling operation of the cellular telephone in geographical locations where operation is prohibited.

15 2. The apparatus recited in claim 1, wherein the locating device for ascertaining the geographical location of the cellular telephone is a Global Positioning System.

20 3. The apparatus recited in claim 1, wherein the means for determining whether the cellular telephone is allowed to operate in the ascertained geographical location comprises:

25 a memory within the cellular telephone for storing information pertaining to authorization to operate in geographical locations; and

30 a controller within the cellular telephone for comparing the ascertained geographical location from the locating device with information in the memory and determining whether operation is allowed.

35 4. The apparatus recited in claim 3, wherein the means for disabling transmissions of the cellular telephone includes the controller disabling transmissions when operation is not allowed.

5. The apparatus recited in claim 3, wherein the memory is a Subscriber Identity Module card.

-11-

6. The apparatus recited in claim 3, wherein information stored in the memory is preprogramed.

5 7. The apparatus recited in claim 3, wherein information stored in the memory is down loaded from a cellular telephone network.

10 8. The apparatus recited in claim 7, wherein information stored in the memory is updated periodically from the cellular telephone network.

15 9. The apparatus recited in claim 1, wherein the means for determining whether the cellular telephone is allowed to operate in its ascertained geographical location comprises:

a transceiver within the cellular telephone for transmitting the ascertained geographical location from the locating device to a cellular telephone network;

20 a database pertaining to authorization to operate in geographical locations, the database accessible by the cellular telephone network; and

25 the cellular telephone network comparing the ascertained geographical location transmitted by the transceiver with information in the database for determining whether operation is allowed in the ascertained geographical location, the cellular telephone network further for transmitting a signal authorizing or denying operation of the cellular telephone and further transmitting a parameter instructing the cellular
30 telephone when to perform location updating.

35 10. The apparatus recited in claim 9, wherein the means for disabling transmissions of the cellular telephone comprises a controller in the cellular telephone which disables transmissions in response to the cellular telephone network transmitting a signal denying operation.

-12-

11. The apparatus recited in claim 9, wherein the cellular telephone network stores the most recent ascertained location.

5 12. A method for restricting operation of a cellular telephone based on the geographical location of the cellular telephone comprising the steps of:

 ascertaining the geographical location of the cellular telephone;

10 . determining whether operation of the cellular telephone is allowed in the ascertained geographical location; and

 enabling or disabling operation of the cellular telephone depending on whether operation is determined to
15 be allowed or prohibited in the ascertained geographical location.

13. The method recited in claim 12, wherein the step
20 of determining whether operation is allowed further comprises comparing the ascertained geographical location to information contained in the cellular telephone pertaining to the authorization to operate in geographical locations.

25 14. The method recited in claim 12, wherein the step of determining whether operation is allowed comprises the steps of:

 transmitting the ascertained geographical location to a cellular telephone network;

30 . comparing, by the cellular telephone network, the transmitted ascertained geographical location with information contained in the cellular telephone network pertaining to the authorization to operate in geographical locations;


35 . transmitting a signal authorizing operation if operation is allowed in the ascertained geographical location; otherwise

-13-

transmitting a signal denying operation if operation is not allowed in the ascertained geographical location.

- 5 15. The method recited in claim 14, further including the step of instructing the cellular telephone when to perform location updating.

1/3

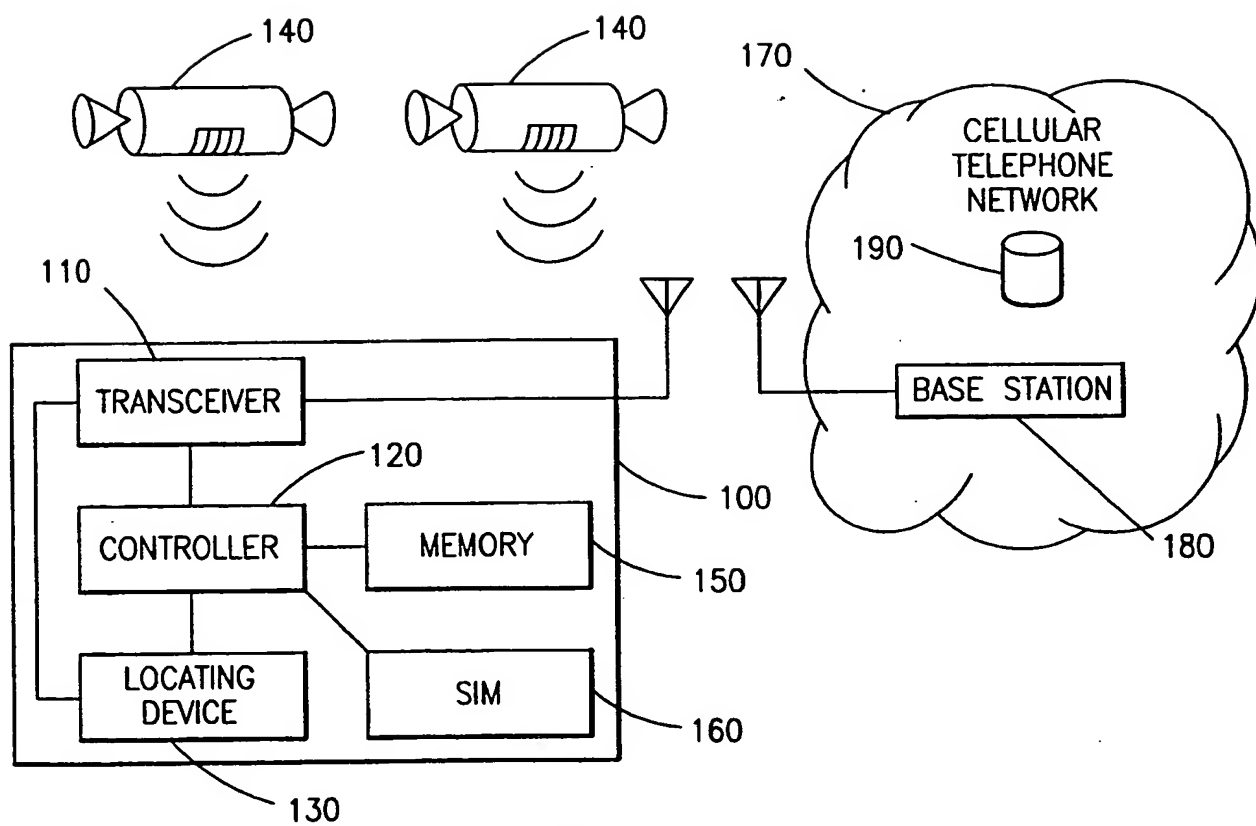**FIG. 1**

2/3

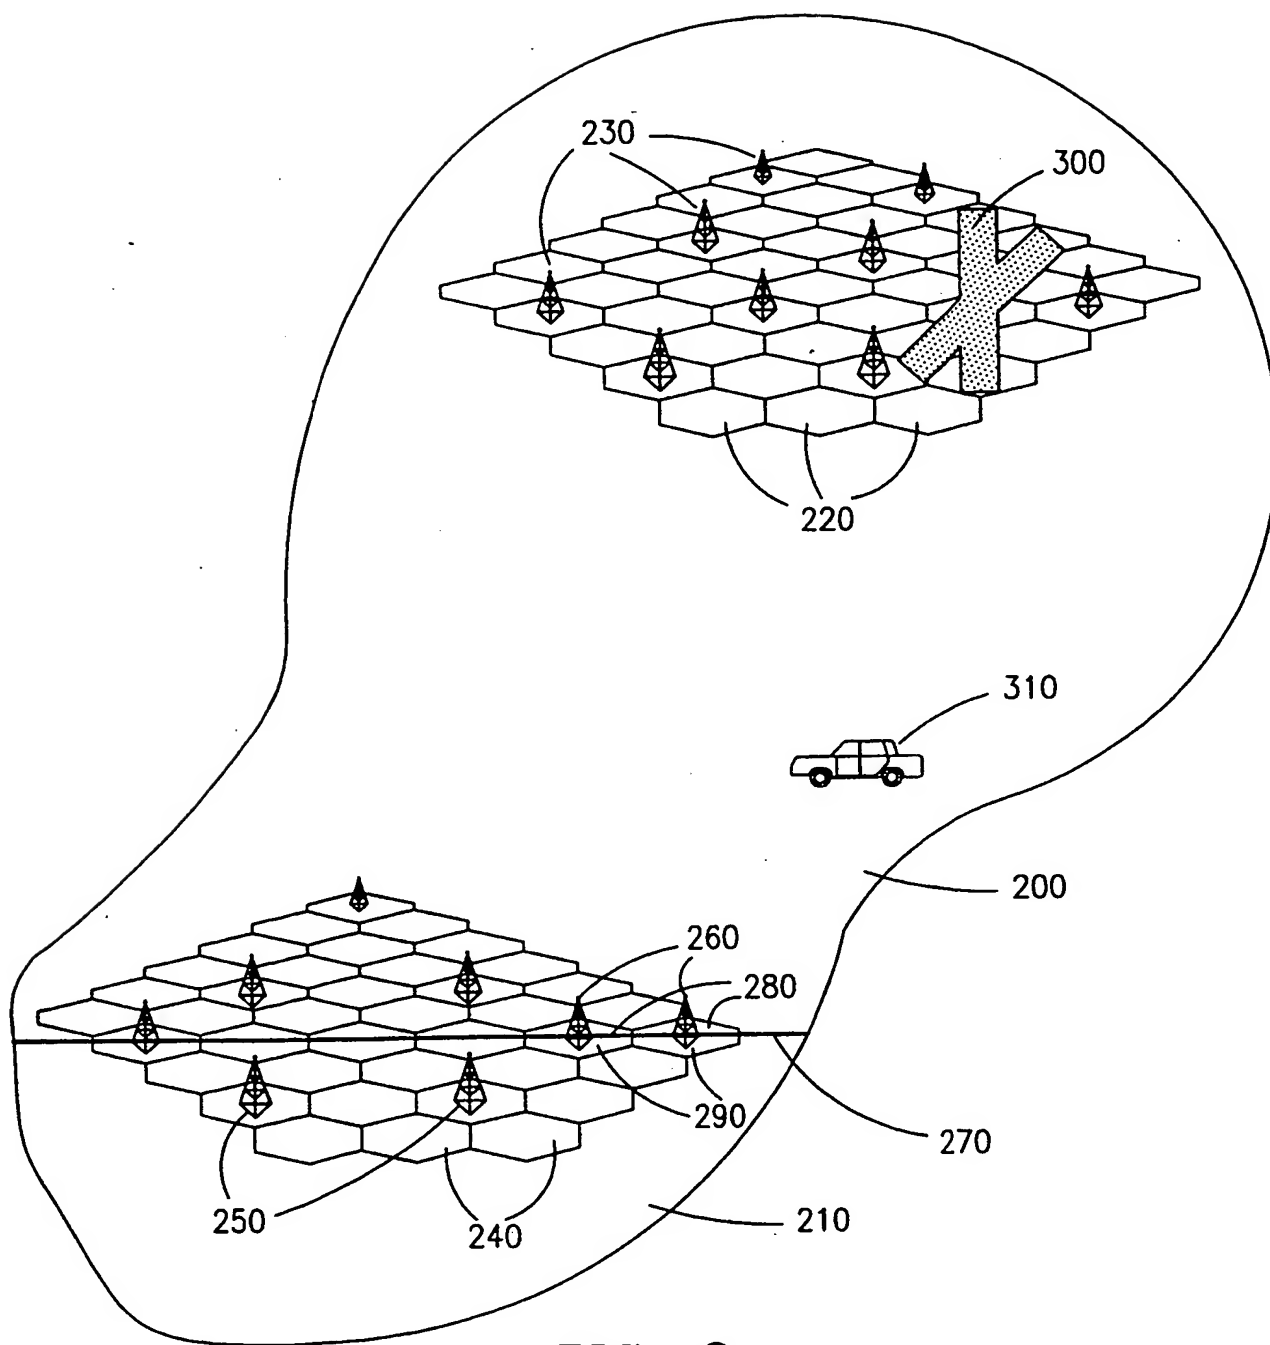
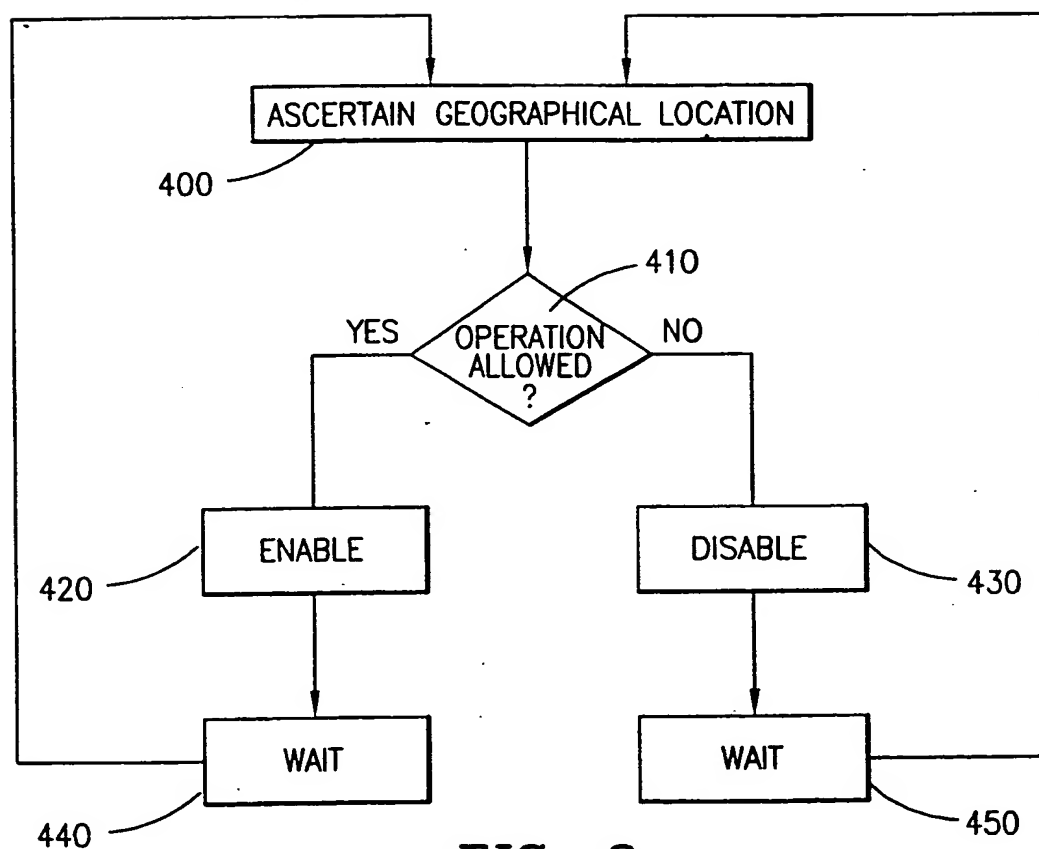


FIG. 2

3/3

**FIG. 3**

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 97/21983

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/38 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No:
X	WEISS K ET AL: "CONVENTIONAL LOCAL AREA RADIO COVERAGE SYSTEM" MOTOROLA TECHNICAL DEVELOPMENTS, vol. 13, 1 July 1991, pages 67-69, XP000259225	1,3,4, 6-8,12, 13
A	see the whole document ---	10,11
X	EP 0 641 137 A (SIEMENS AG) 1 March 1995	1,3,5,6, 12,13
A	see the whole document ---	11
X	US 5 442 805 A (SAGERS RICHARD C ET AL) 15 August 1995	1-4,6, 12,13
Y	see column 2, line 34 - line 55 see column 3, line 6 - line 12 see column 3, line 56 - column 4, line 34 see claims 1-3,5 ---	9-11,14, 15
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

2 April 1998

Date of mailing of the international search report

08/04/1998.

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Coppieters, S

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 97/21983

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 300 787 A (NIPPON ELECTRIC CO) 13 November 1996	12
Y	see page 3, line 7 - page 4, line 8 see page 5, line 8 - line 23 see page 6, line 7 - line 15 see page 9 see abstract; claims 1-3; figure 2 -----	9-11, 14, 15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/21983

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0641137 A	01-03-95	FI 943935 A	28-02-95
US 5442805 A	15-08-95	AU 4187789 A	01-05-90
		CA 1317348 A	04-05-93
		CN 1041676 A	25-04-90
		WO 9004293 A	19-04-90
GB 2300787 A	13-11-96	JP 8307946 A	22-11-96

THIS PAGE BLANK (USPTO)